



ALN-9762

SHORT INLAY (HIGGS™ 4)

The Alien Technology® ALN-9762 “Short” RFID inlay is a narrow, high-performance, Higgs™ 4 based member of the Squiggle® family. Brings all the Higgs™ 4 advantages to highly-effective “Short” Inlay.



Applications

- Volume Retail/Apparel
- Enterprise Wide Asset Management
- Warehouse Management
- Tracking Challenging Materials and Objects

FEATURE	DESCRIPTION	BENEFIT
Next generation Higgs™ 4 read/write performance in the highly-efficient “Short” Squiggle family tag	One of Aliens best performing general-purpose tags boosted by Higgs™ 4 performance and features.	Highly efficient smaller form-factor tag, still robust, proven and reliable.
Optimized 448 bit memory footprint	Optimized for both high-performance and high-volume applications	Designed to drive down the cost-of-ownership while increasing efficiencies of RFID solutions in large enterprises

Features:

- › Designed to meet EPCglobal Gen2 (V 1.2.0) and ISO/IEC 18000-6C
- › Worldwide operation in the RFID UHF bands (840-960 MHz)
- › 448-Bits of NVRAM Memory
 - 128-EPC Bits
 - 128 User Bits
 - 64 Bit Unique TID
 - 32 Bit Access and 32 bit Kill Passwords
- › Pre-Programmed with a unique, unalterable 64-bit serial number
- › User Memory can be Block Perma-Locked as well as read password protected in 32 Bit Blocks
- › Low power operation for both read and program
- › Dynamic Authentication™ - anti-cloning/anti-counterfeit technology
- › Exceptional operating range, up to 11m with appropriate antenna.
- › Available in high-yield, high capacity dry/wet inlay rolls

Product Overview:

Powered by Alien®’s volume focused **Higgs™ 4 UHF RFID IC** and **innovative Short antenna design**, the ALN-9762 delivers industry leading EPC Gen 2 read and write performance in a narrower width than it’s bigger brother, the Squiggle®.

ALN-9762 inlays are *World Tag* compliant, enabling consistent operation across the diverse frequencies of the Americas, Europe, Middle East, Asia, and Africa.


With its Higgs-4 core, the Short delivers next generation performance and a rich feature set, yet is completely **optimized for the highest volume enterprise, retail, and apparel applications.**

An optimized memory footprint includes a 32-bit TID, a **64-bit Unique TID for authentication** and **next generation serialization** applications, a **128-bit EPC memory** bank, 128-bits of user memory for distributed data applications, and **password protected read and write** support capabilities to prevent unauthorized viewing and modification of the tag’s data.


Typical applications for the Short include, but are not limited to, corrugate cases, pallet placard labels, apparel hang tags, shipping labels, asset management, file folder labels, and application on plastics.

ALN 9762 Short Inlay


ALN-9762 Inlay Orientation

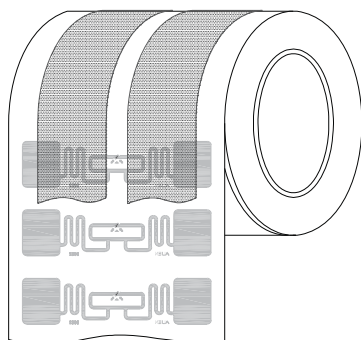

ALN-9762-R
(Dry Unslit Roll)

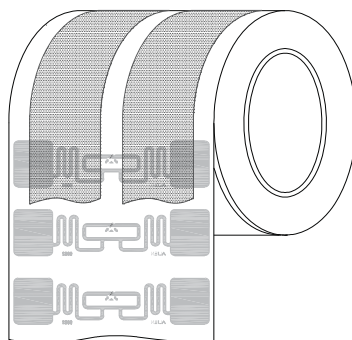


ALN-9762-SR
(Dry Slit Roll)

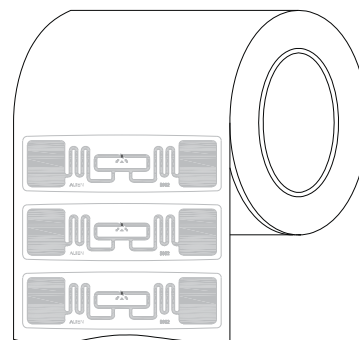


ALN-9762-WRW
(White Wet Inlay)

Standard Alien Inlay rolls unwind with metal antenna side facing outward, with respect to the core.


ALN-9762 Inlay Specification

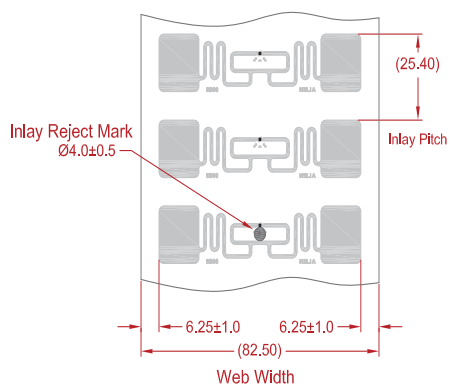

ALN-9762-R
(Dry Unslit Roll)

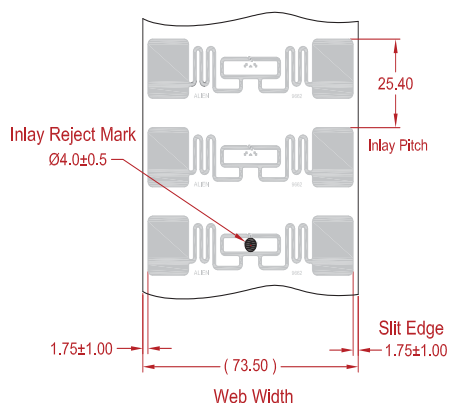


ALN-9762-SR
(Dry Slit Roll)

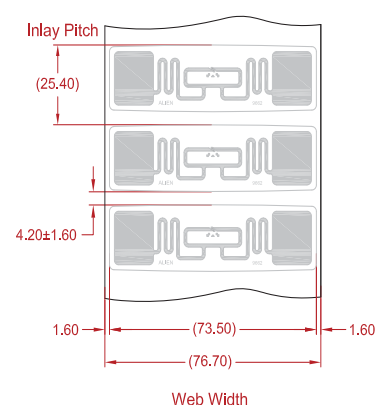

ALN-9762-WRW
(White Wet Inlay)

ALN 9762 Short Inlay

ALN-9762 Inlay General Dimensions

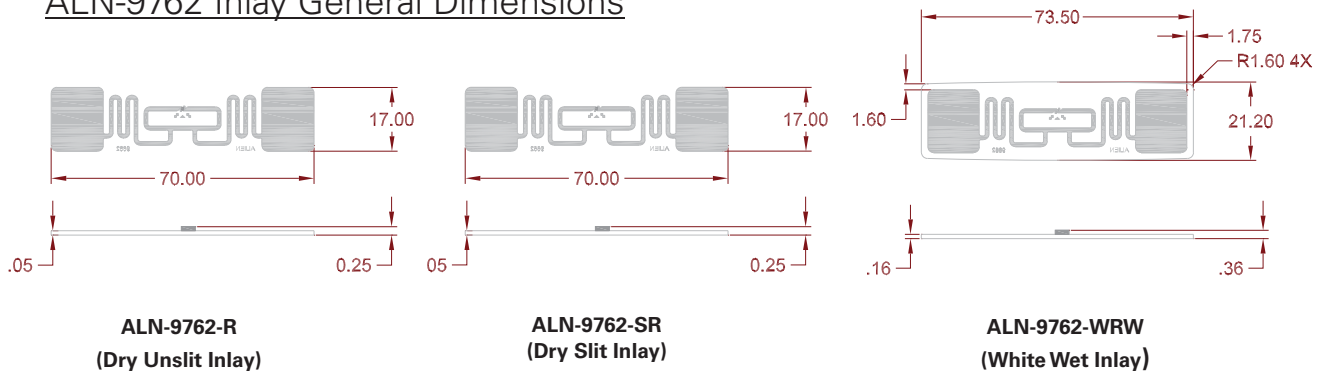

ALN-9762 Inlay Stackup

DRY INLAY THICKNESS, $\pm 20\%$	
OVER ANTENNA	0.05 mm
OVER CHIP	0.25 mm

DRY INLAY THICKNESS, $\pm 20\%$	
OVER ANTENNA	0.05 mm
OVER CHIP	0.25 mm

WHITE WET INLAY THICKNESS, $\pm 20\%$	
OVER ANTENNA	0.16 mm
OVER CHIP	0.36 mm



ALN-9762-R
(Dry Unslit Inlay)





ALN-9762-SR
(Dry Slit Inlay)



ALN-9762-WRW
(White Wet Inlay)

ALN-9762 Inlay Angular Sensitivity

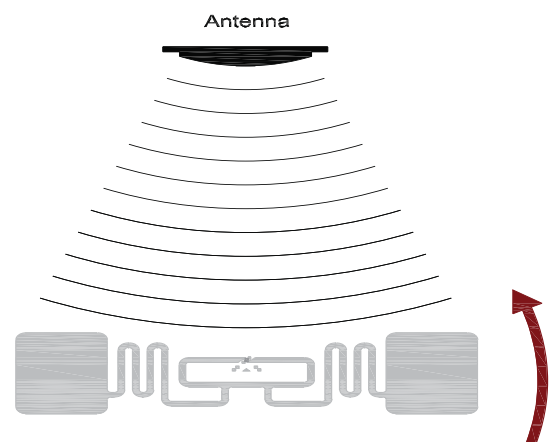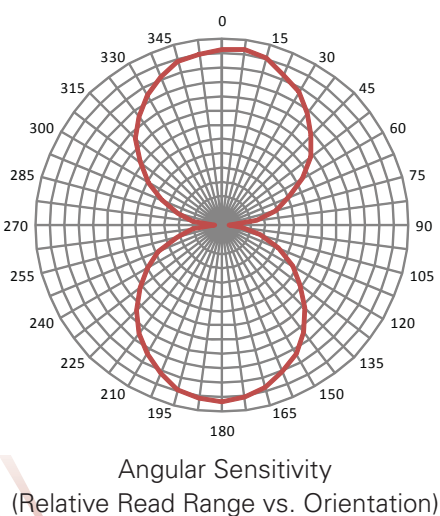

Angular Sensitivity
Inlay is rotated in the x, y, plane about the z axis
(tag shown at 0° with respect to face of antenna)



ALN 9762 Short Inlay

ALN-9762 Specifications

Dry Inlay		Environmental	
Antenna Width	2.756" [70mm]	Shelf Life	2 years at +77°F [+25°C] @ 40%RH
Antenna Length	0.669" [17mm]	Recommended Storage	+77°F [+25°C] @ 40% RH
Web Width (-R)	3.25" [82.5mm]	Storage Limits	-13°F to 122°F [-25°C to +50°C] 20% to 90% RH Non-condensing
Web Width (-SR)	2.89" [73.5mm]	Operating Limits	-40°F to +158°F [-40°C to +70°C] 20% to 90% RH Non-condensing
Web Pitch	1.0" [25.4mm]	Bend Diameter	> 1.97" [50mm]
Core Width (-R)	3.25" [82.5mm]	Pressure	< 5N/mm ²
Core Width (-SR)	2.89" [73.5mm]	Drop Resistance	Per ASTM D5276
Core ID	6" [152.4mm]	Write Cycles	100,000 @ 25°C
Core Material	Fiberboard	RoHs	2002/95/EC Compliant
Interleaf Material	Paper	REACH	1907/2006/EC Compliant
Interleaf Width	1.5" [38.1mm]	ESD – HBM / CDM	> 5.0kV / > 1.5kV
Inlays per Roll	12,500 Nominal	RFID	
Maximum Roll OD	< 12" [304.8mm]	Protocols Supported	ISO/IEC 18000-6C EPCglobal Class 1 Gen 2
Roll Labeling Data	Roll #, Quantity	Integrated Circuit	Alien Higgs-4
		EPCglobal Certificate	950110126000001084
		Operating Frequency	840–960 MHz
		EPC Size	128 Bits
		User Memory	128 Bits
		TID	32 Bits
		Unique TID	64 Bits
		Access Password	32 Bits
		Kill Password	32 Bits
Wet Inlay			
Inlay Width	2.96" [73.5mm]		
Inlay Length	0.835" [21.2mm]		
Web Width	3.02" [76.7mm]		
Web Pitch	1.0" [25.4mm]		
Core Width	2.874" [73.0mm]		
Core ID	6" [152.4mm]		
Core Material	Fiberboard		
Inlays per Roll	12,500 Nominal		
Maximum Roll OD	< 16" [406.4mm]		
Roll Labeling Data	Roll #, Quantity		
Overlay	TT Printable White Film Overlay		
Overlay Adhesive	General Purpose Permanent		
Inlay Adhesive	General Purpose Permanent		
Adhesive Application Temperature	> +36.5°F [+2°C]		
Adhesive Service Temperature	-4°F to +199.4°F [-20°C to +93°C]		
Release Liner	40# SCK		

Copyright © 2012 Alien Technology Corporation. All rights reserved.

Alien, Alien Technology, the Alien Technology logo, FSA, Higgs, Dynamic Authentication, Quick-Write, Squiggle, and the Squiggle logo are trademarks or registered trademarks of Alien Technology Corporation in the U.S. and other countries.

HANDLING PRECAUTIONS Observe standard handling practices to minimize ESD.

DISCLAIMER Application recommendations are guidelines only - actual results may vary and should be confirmed. This is a general purpose product not designed or intended for any specific application.

This product is covered by one or more of the following U.S. patents: 7967204, 7931063, 7868766, 7737825, 7716208, 7716160, 7688206, 7659822, 7619531, 7615479, 7598867, 7580378, 7576656, 7562083, 7561221, 7559486, 7559131, 7554451, 7551141, 7548201, 7548008, 7531218, 7522065, 7500910, 7489248, 7453705, 7425467, 7417386, 7411503, 7385284, 7377445, 7364084, 7353598, 7342490, 7324061, 7321159, 7301458, 7295114, 7288432, 7265675, 7262086, 7260882, 7253735, 7244326, 7218527, 7214569, 7199537, 7193508, 7173528, 7172910, 7172789, 7141176, 7113259, 7101302, 7080444, 7070851, 7068224, 7046328, 6998644, 6988667, 6985361, 6980184, 6970219, 6952157, 6942155, 6933848, 6927085, 6816380, 6780696, 6731353, 6693384, 6683663, 6665044, 6657289, 6623579, 6606247, 6606079, 6590346, 6586338, 6566744, 6555408, 6527964, 6479395, 6468638, 6420266, 6316278, 6291896, 6281038. Other patents pending.



Distributed by
SOFTWARE Srl
Via Zanardelli, 13/A
25062 Concesio (BS) Italy
Tel. +39 030 200 81 49
www.rfidglobal.it

12 April 2012