


OBID[®] classic-pro

Multi-tag Reader Modules ID CPR (13,56 MHz)

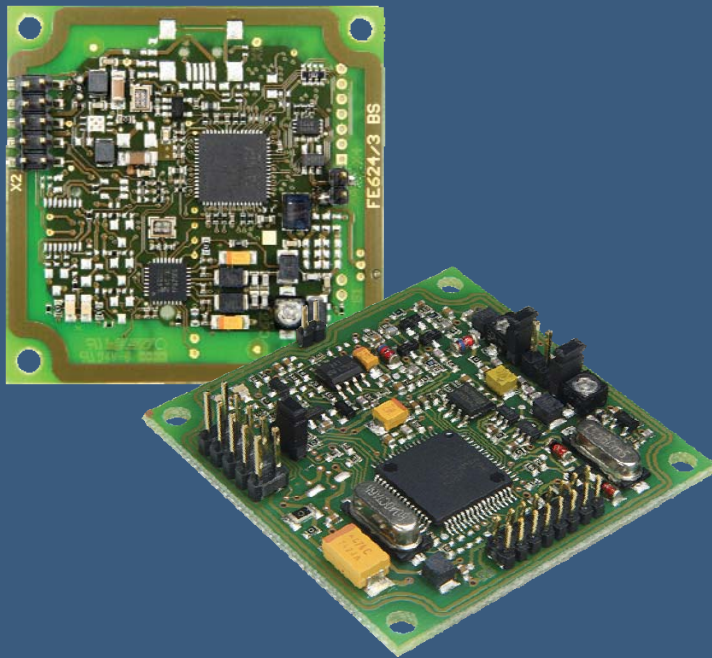

FEATURES

- 5V- and 3.3V variants available
- Also available as USB variant
- Data rates up to 847 kBit/s
- Low power consumption
- Command Queue for explicit reduction of communication cycles between host and reader module
- Supports NFC applications
- Optional: 2 SAM sockets



Order description: ID CPR40.0x / ID CPR.M02.VP/AB-x

Special advices:

- The higher operation speed is caused by the so-called „Command Queue“. With this Command Queue a sequence of commands can be sent to the reader module within one poll.

The result is an explicit reduction of communication cycles between host and reader.

- Beside the six reader modules ID CPR40.0x, the ISO 15693 / ISO14443-reader modules ID CPR.M02.VP/AB-B and -BA resp. ID CPR.M02.VP/AB-C and -CA are available.

Reader modules with integrated antenna

	ID CPR40.00-CD 3.3	ID CPR40.00-A	ID CPR40.00-CDUSB	ID CPR.M02.VP/AB-B	ID CPR.M02.VP/AB-C
Dimensions	50 x 50 x 14 mm	50 x 50 x 14 mm	50 x 50 x 14 mm	50 x 50 x 14 mm	50 x 50 x 14 mm
RS232-TTL interface	x		x	x	x
Data/Clock interface	x		x	x	x
Wiegand interface	x		x	x	x
RS232 interface		x			
USB interface			x		
Supply voltage	3,3V	5V	5V	5V	5V
ISO 14443-A/-B	x	x	x	x	x
ISO 14443 Part 4 Support	x	x	x	TCL Firmware	TCL Firmware
Mifare classic read / write	x	x	x	x	x
ISO 15693				x	x
I-CODE1				x	
Data rate	106-847 kBit/s	106-847 kBit/s	106-847 kBit/s	106 kBit/s	106 kBit/s
NFC compatibility	x	x	x	x	x
Current consumption	130 mA	130 mA	130 mA	300 mA	300 mA
Read 64 Byte mifare classic	2,6 ms	2,6 ms	2,6 ms	4,1 ms	4,1 ms
RF transmitting power	100 mW	100 mW	100 mW	250 mW	250 mW
Command Queue	x	x	x		
Opt. 2 SAM	x	x	x		

Accessories:

- ID ISC.ANT40/30 External antenna 40 mm x 30 mm
- ID ISC.ANT100/100 External antenna 100 mm x 100 mm
- ID NET.5V 5V power supply
- ID CO.RS232/LVTTL-A Converter LVTTTL to RS232
- ID CO.RS232/TTL-A Converter TTL to RS232
- ID CAB.RS-A Cable for RS232/485 and power supply
- ID CAB.A-A Adapter cable, 10 cm

FEIG ELECTRONIC reserves the right to change specification without notice at any time.
Stand of information: August 2011.

Order description: ID CPR40.0x / ID CPR.M02.VP/AB-x

Reader modules for operation with external antennas

	ID CPR40.01-CD 3.3	ID CPR40.01-A	ID CPR40.01-CDUSB	ID CPR.M02.VP/AB-BA	ID CPR.M02.VP/AB-CA
Dimensions	50 x 50 x 14 mm	50 x 50 x 14 mm	50 x 50 x 14 mm	50 x 50 x 14 mm	50 x 50 x 14 mm
RS232-TTL interface	x		x	x	x
Data/Clock interface	x		x	x	x
Wiegand interface	x		x	x	x
RS232 interface		x			
USB interface			x		
Supply voltage	3,3V	5V	5V	5V	5V
ISO 14443-A/-B	x	x	x	x	x
ISO 14443 Part 4 Support	x	x	x	TCL Firmware	TCL Firmware
Mifare classic read / write	x	x	x	x	x
ISO 15693				x	x
I-CODE1				x	
Data rate	106-847 kBit/s	106-847 kBit/s	106-847 kBit/s	106 kBit/s	106 kBit/s
NFC compatibility	x	x	x	x	x
Current consumption	130 mA	130 mA	130 mA	300 mA	300 mA
Read 64 Byte mifare classic	2,6 ms	2,6 ms	2,6 ms	4,1 ms	4,1 ms
RF transmitting power	100 mW	100 mW	100 mW	250 mW	250 mW
Command Queue	x	x	x		
Opt. 2 SAM	x	x	x		

Standard conformity

Radio approval

Europe EN 300 330
USA FCC 47 CFR Part 15

EMC EN 301 489

Safety EN 60950
Health EN 50364



As external antennas, two 50Ω antennas ID ISC.ANT40/30 and ID ISC.ANT100/100 are available.

FEIG ELECTRONIC reserves the right to change specification without notice at any time.
Stand of information: August 2011.